
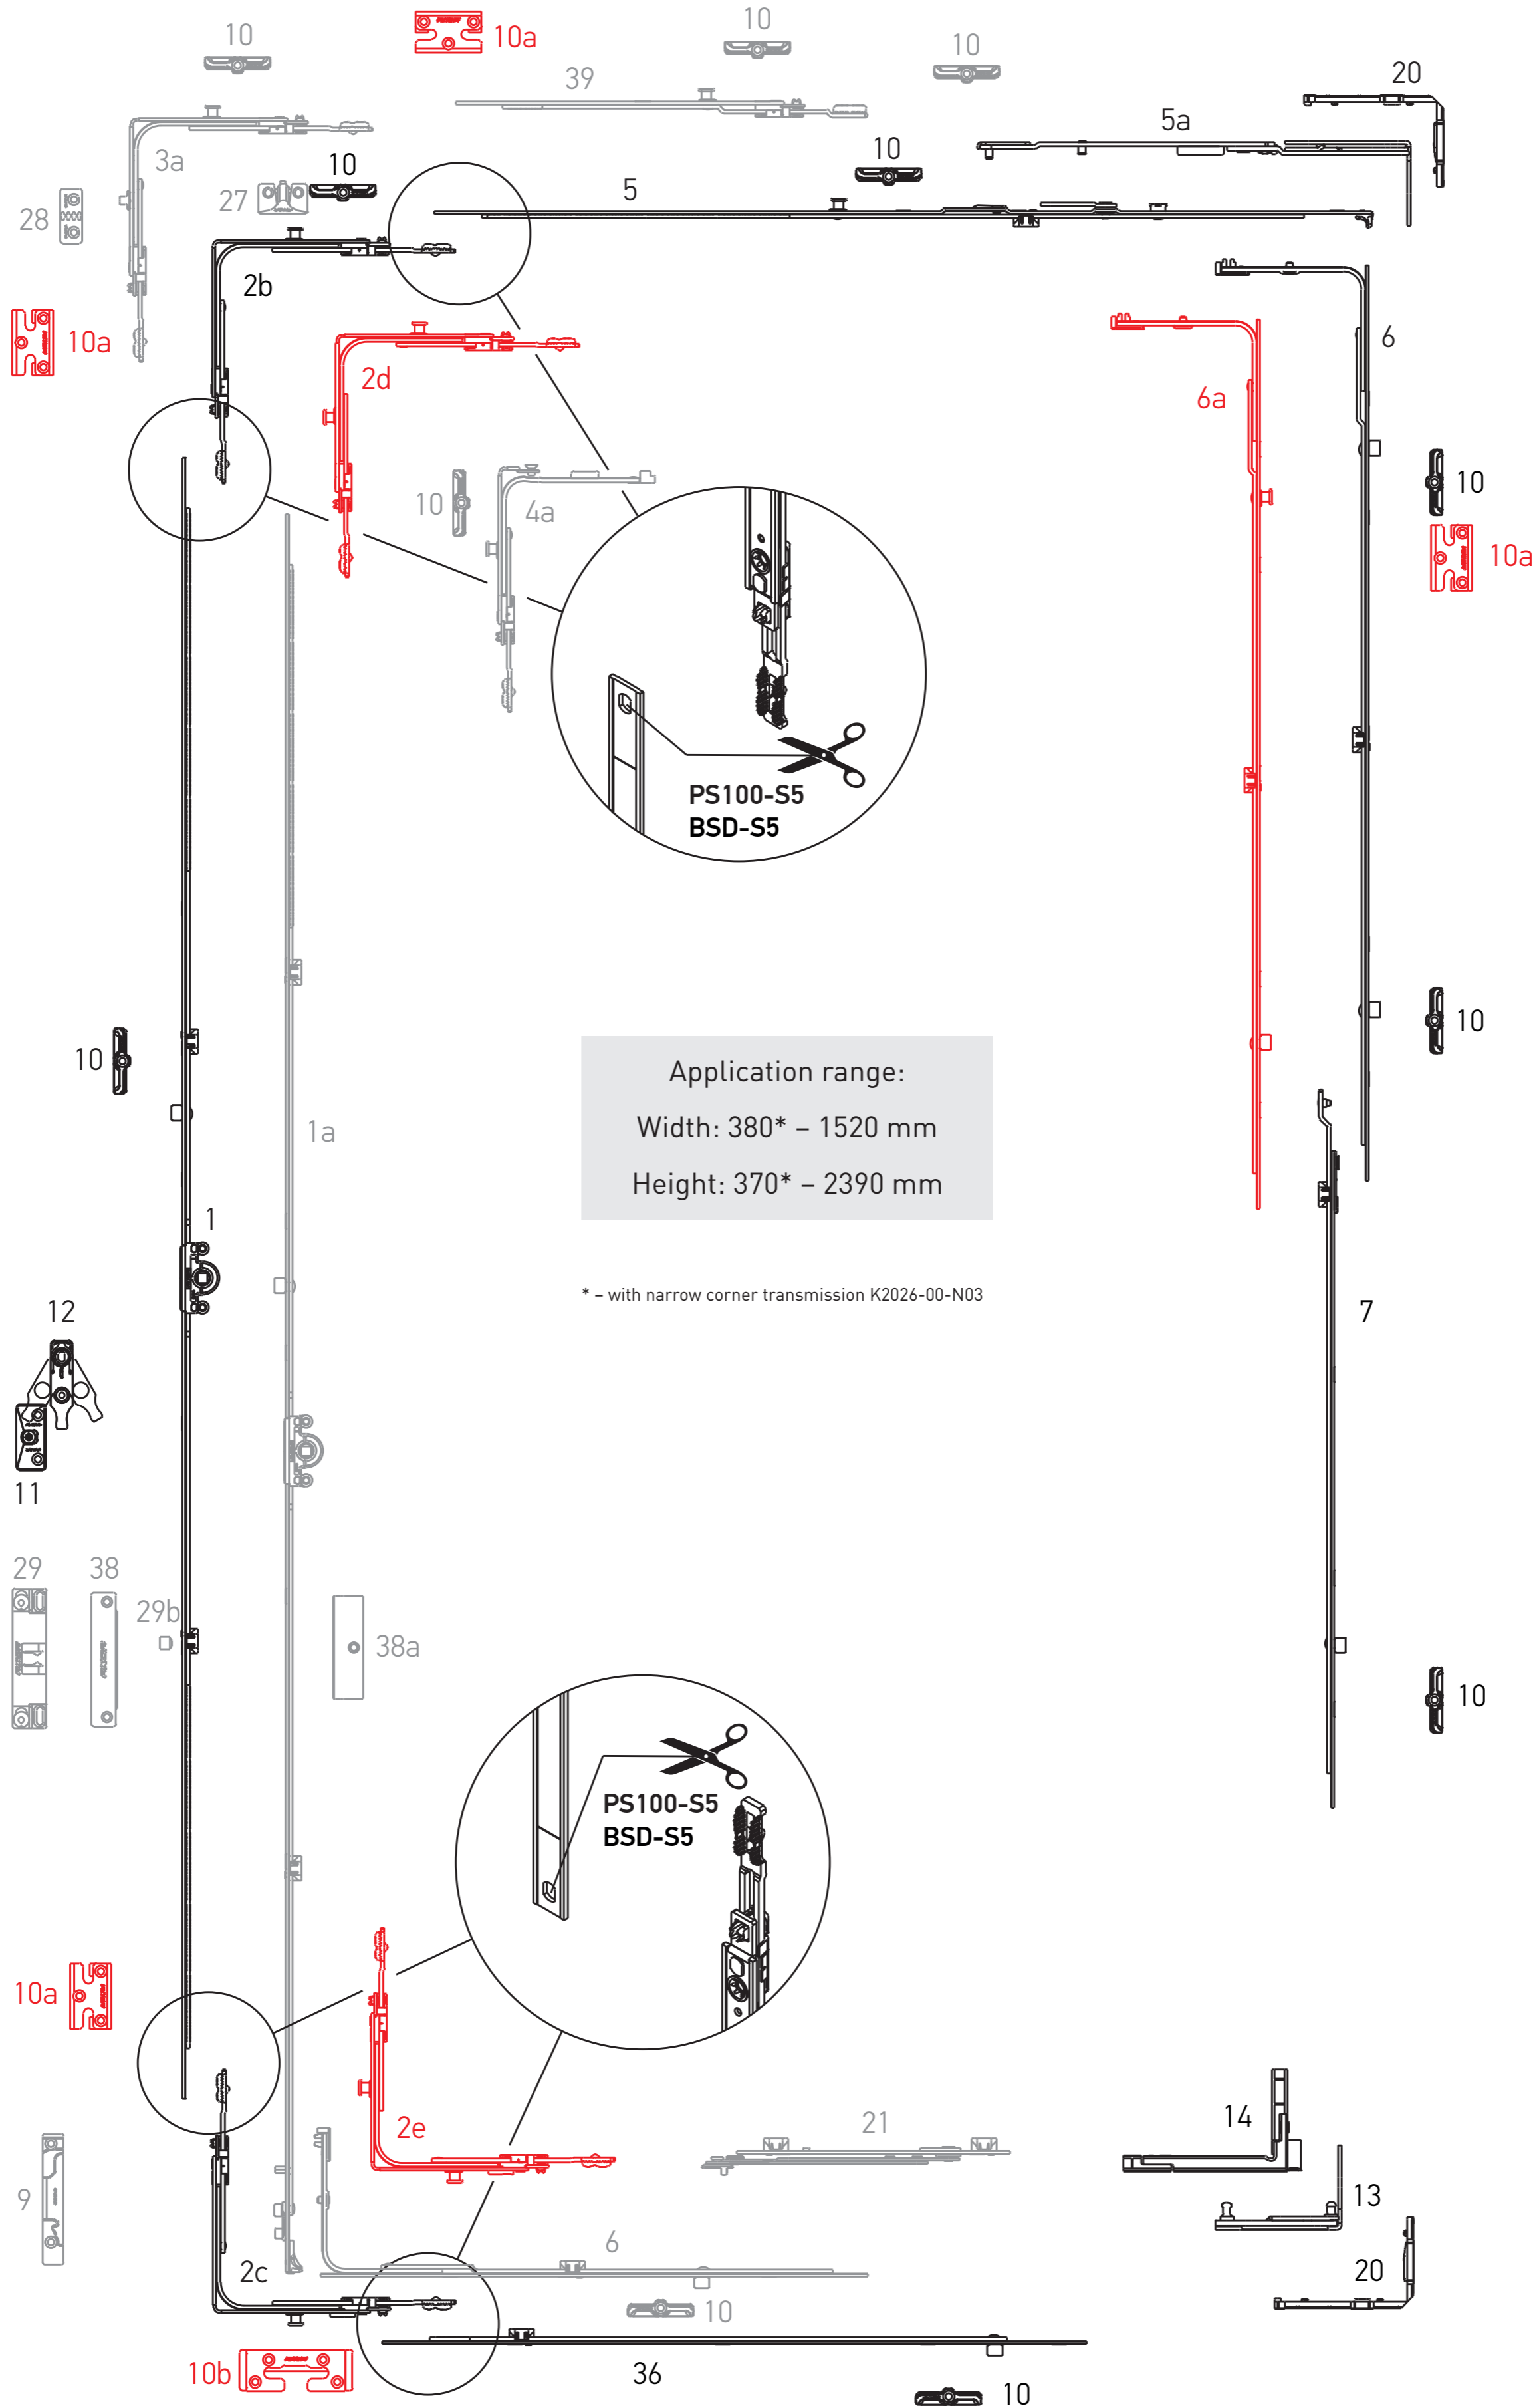
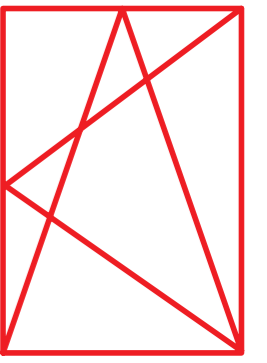




N°	Description	Application range by width	Application range by height	Part No.
1	Gear variable 0, L=320, 450-550	—	450-550	K1001-02-N03
	Gear variable 1, L=520, 551-750	—	551-750	K1001-04-N03
	Gear variable 2, L=1000, 751-1230, 1 ML	—	751-1230	K1001-09-N03
	Gear variable 3, L=1200, 950-1430, 1 ML	—	950-1430	K1001-11-N03
	Gear variable 4, L=1480, 1231-1710, 2 ML	—	1231-1710	K1001-14-N03
	Gear variable 5, L=1680, 1431-1910, 2 ML	—	1431-1910	K1001-16-N03
	Gear variable 6, L=2160, 1911-2390, 3 ML	—	1911-2390	K1001-21-N03
1a	Constant tilt-turn gear 0, L=435, G=140, 370-550*	—	370-550	K1004-04-N03
	Constant tilt-turn gear 1, L=385, G=175, 400-500*	—	400-500	K1004-03-N03
	Constant tilt-turn gear 2, L=565, G=200, 480-680*	—	480-680	K1004-05-N03
	Constant tilt-turn gear 3, L=805, G=300, 681-920*, 1 ML	—	681-920	K1004-08-N03
	Constant tilt-turn gear 4, L=1045, G=450, 921-1160*, 1 ML	—	921-1160	K1004-10-N03
	Constant tilt-turn gear 5, L=1285, G=600, 1161-1400*, 1 ML	—	1161-1400	K1004-12-N03
	Constant tilt-turn gear 6, L=1525, G=600, 1401-1640*, 2 ML	—	1401-1640	K1004-15-N03
	Constant tilt-turn gear 7, L=1765, G=600, 1641-1880*, 2 ML	—	1641-1880	K1004-17-N03
	Constant tilt-turn gear 8, L=1765, G=1000, 1641-1880*, 2 ML	—	1641-1880	K1004-18-N03
	Constant tilt-turn gear 9, L=2005, G=1000, 1881-2120*, 2 ML	—	1881-2120	K1004-20-N03
Constant tilt-turn gear 10, L=2245, G=1000, 2121-2360*, 3 ML	—	2121-2360	K1004-22-N03	
2	Corner transmission, 1 ML, 150x150	480-1280	450-2390	K2001-00-N03
2a	Corner transmission, 1 MR, 150x150	480-1280	450-2390	K2005-00-N03
3	Corner transmission, integrated slit, 1 ML, 150x150, left	480-1280	450-2390	K2004-00-L03
	Corner transmission, integrated slit, 1 ML, 150x150, right	480-1280	450-2390	K2004-00-R03
4	Narrow corner transmission, 1 ML, 50x150	380-480	450-2390	K2003-00-N03
		480-680	370-550	
5	Concealed stay arm connecting plate 1, L=565, 480-680, left / right	480-680	—	K3030-06-L/R03
	Concealed stay arm connecting plate 2, L=685, 600-800, left / right	601-800	—	K3030-07-L/R03
	Concealed stay arm connecting plate 3, L=925, 801-1040, left / right	801-1040	—	K3030-09-L/R03
	Concealed stay arm connecting plate 4, L=1165, 1041-1280, left / right	1041-1280	—	K3030-12-L/R03
5a	Concealed stay arm PVC, 13 mm, 480-800, left / right	480-800	—	A3001-02-L/R03
	Concealed stay arm PVC, 13 mm, 801-1040, left / right	801-1040	—	A3001-03-L/R03
	Concealed stay arm PVC, 13 mm, 1041-1280, left / right	1041-1280	—	A3001-04-L/R03
	Concealed stay arm PVC, 9 mm, 480-800, left / right	480-800	—	A3002-02-L/R03
	Concealed stay arm PVC, 9 mm, 801-1040, left / right	801-1040	—	A3002-03-L/R03
	Concealed stay arm PVC, 9 mm, 1041-1280, left / right	1041-1280	—	A3002-04-L/R03
6	Middle lock L=400, 2 ML	600-1000	600-1000	K4004-04-N03
	Middle lock L=650, 2 ML	850-1250	850-1250	K4004-06-N03
	Middle lock L=720, 2 ML	920-1320	920-1320	K4004-07-N03
	Middle lock L=820, 2 ML	1251-1430	1251-1430	K4004-08-N03
	Middle lock L=1130, 3 ML	—	1251-1730	K4004-11-N03
6a	Middle lock L=400, 1 MR + 1 ML	600-1000	600-1000	K4008-04-N03
	Middle lock L=650, 1 MR + 1 ML	850-1250	850-1250	K4008-06-N03
	Middle lock L=820, 1 MR + 1 ML	1251-1430	1251-1430	K4008-08-N03
	Middle lock L=1130, 1 MR + 2 ML	—	1251-1730	K4008-11-N03
7	Middle lock extension, 1 ML, 480 mm	—	1710-2210	K4005-05-N03
	Middle lock extension, 1 ML, 680 mm	—	2211-2390	K4005-07-N03
8	Bottom extension	—	450-800	K4009-00-N03
		—	801-2390	K4002-00-N03
9	Tilt locking plate, right	—	—	**
	Tilt locking plate, left	—	—	**
10	Locking plate	—	—	**
10a	Locking plate safety	—	—	**
10b	Tilt locking plate safety	—	—	**
11	Lifting plate	—	751-2390	**
12	Wrong operation safety device with sash lifter	—	751-2390	A7001-00-N03
13	Concealed bottom hinge PVC, 9 mm, left / right	—	—	A5025-09-L/R03
	Concealed bottom hinge PVC, 13 mm, left / right	—	—	A5025-13-L/R03
14	Concealed bottom sash hinge, 9 mm, left / right	—	—	A5027-09-L/R03
	Concealed bottom sash hinge, 13 mm, left / right	—	—	A5027-13-L/R03
20	Concealed hinge packer, 13 mm, left / right	—	—	A7*-13-L/R03
21	Sash turning restrictor	—	—	A7110-00-N03
26	Extension lock 275 mm, 1 ML	—	—	K4003-02-N03
27	Locking plate, integrated slit	—	—	**
28	Locking plate for integrated slit (frame part)	—	—	**
29	Balcony catch	—	—	A7184-13-N03
29b	Balcony locking pin	—	—	A7207-00-N03
36	Extension lock for corner transmission 480 mm, 1 ML	—	—	K4010-00-N03
	Extension lock for corner transmission 680 mm, 1 ML	—	—	K4010-07-N03
	Extension lock for corner transmission 880 mm, 2 ML	—	—	K4010-09-N03
	Extension lock for corner transmission 480 mm, 1 MR	—	—	K4030-00-N03
38	Magnetic balcony catch, frame part	—	—	A7053-00-N03
38a	Magnetic balcony catch, sash part	—	—	A7055-***-N03

\* – with offset relative to center

\*\* – see the section "Profile-dependent elements" of catalogues KOMFORT LINE K-3 or ELITE+

\*\*\* – according to displacement axis of sash groove (9 mm, 10 mm, 13 mm, 14 mm)



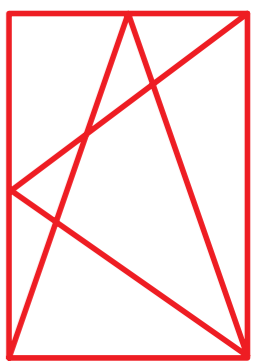

Nº	Description	Application range by width	Application range by height	Part No.
1	Gear variable 0, L=320, 450-550	—	450-550	K1001-02-N03
	Gear variable 1, L=520, 551-750	—	551-750	K1001-04-N03
	Gear variable 2, L=1000, 751-1230, 1 ML	—	751-1230	K1001-09-N03
	Gear variable 3, L=1200, 950-1430, 1 ML	—	950-1430	K1001-11-N03
	Gear variable 4, L=1480, 1231-1710, 2 ML	—	1231-1710	K1001-14-N03
	Gear variable 5, L=1680, 1431-1910, 2 ML	—	1431-1910	K1001-16-N03
	Gear variable 6, L=2160, 1911-2390, 3 ML	—	1911-2390	K1001-21-N03
1a	Constant tilt-turn gear 0, L=435, G=140, 370-550*	—	370-550	K1004-04-N03
	Constant tilt-turn gear 1, L=385, G=175, 400-500*	—	400-500	K1004-03-N03
	Constant tilt-turn gear 2, L=565, G=200, 480-680*	—	480-680	K1004-05-N03
	Constant tilt-turn gear 3, L=805, G=300, 681-920*, 1 ML	—	681-920	K1004-08-N03
	Constant tilt-turn gear 4, L=1045, G=450, 921-1160*, 1 ML	—	921-1160	K1004-10-N03
	Constant tilt-turn gear 5, L=1285, G=600, 1161-1400*, 1 ML	—	1161-1400	K1004-12-N03
	Constant tilt-turn gear 6, L=1525, G=600, 1401-1640*, 2 ML	—	1401-1640	K1004-15-N03
	Constant tilt-turn gear 7, L=1765, G=600, 1641-1880*, 2 ML	—	1641-1880	K1004-17-N03
	Constant tilt-turn gear 8, L=1765, G=1000, 1641-1880*, 2 ML	—	1641-1880	K1004-18-N03
	Constant tilt-turn gear 9, L=2005, G=1000, 1881-2120*, 2 ML	—	1881-2120	K1004-20-N03
	Constant tilt-turn gear 10, L=2245, G=1000, 2121-2360*, 3 ML	—	2121-2360	K1004-22-N03
2b	Corner transmission, 1 MR, 115x115	480-1280	450-2390	K2025-00-N03
2c	Corner transmission, bottom, 1 MR, 115x115	480-1280	450-2390	K2028-00-N03
2d	Corner transmission, 2 MR, 115x115	480-1280	450-2390	K2032-00-N03
2e	Corner transmission, bottom, 2 MR, 115x115	480-1280	450-2390	K2029-00-N03
3a	Corner transmission, integrated slit, 1 MR, left/right, 115x115	480-1280	450-2390	K2034-00-L/R03
4a	Narrow corner transmission, 1 MR, 115x15	380-480	450-2390	K2026-00-N03
		480-680	370-550*	
5	Concealed stay arm connecting plate 1, L=565, 480-680, left / right	480-680	—	K3030-06-L/R03
	Concealed stay arm connecting plate 2, L=685, 600-800, left / right	601-800	—	K3030-07-L/R03
	Concealed stay arm connecting plate 3, L=925, 801-1040, left / right	801-1040	—	K3030-09-L/R03
	Concealed stay arm connecting plate 4, L=1165, 1041-1280, left / right	1041-1280	—	K3030-12-L/R03
5a	Concealed stay arm PVC, 13 mm, 480-800, left / right	480-800	—	A3001-02-L/R03
	Concealed stay arm PVC, 13 mm, 801-1040, left / right	801-1040	—	A3001-03-L/R03
	Concealed stay arm PVC, 13 mm, 1041-1280, left / right	1041-1280	—	A3001-04-L/R03
	Concealed stay arm PVC, 9 mm, 480-800, left / right	480-800	—	A3002-02-L/R03
	Concealed stay arm PVC, 9 mm, 801-1040, left / right	801-1040	—	A3002-03-L/R03
	Concealed stay arm PVC, 9 mm, 1041-1280, left / right	1041-1280	—	A3002-04-L/R03
6	Middle lock, L=400, 2 ML	600-1000	600-1000	K4004-04-N03
	Middle lock, L=650, 2 ML	850-1250	850-1250	K4004-06-N03
	Middle lock, L=720, 2 ML	920-1320	920-1320	K4004-07-N03
	Middle lock, L=820, 2 ML	1251-1430	1251-1430	K4004-08-N03
	Middle lock, L=1130, 3 ML	—	1251-1730	K4004-11-N03
6a	Middle lock, L=400, 1 MR + 1 ML	600-1000	600-1000	K4008-04-N03
	Middle lock, L=650, 1 MR + 1 ML	850-1250	850-1250	K4008-06-N03
	Middle lock, L=820, 1 MR + 1 ML	1251-1430	1251-1430	K4008-08-N03
	Middle lock, L=1130, 1 MR + 2 ML	—	1251-1730	K4008-11-N03
7	Middle lock extension, 1 ML, 480 mm	—	1710-2210	K4005-05-N03
	Middle lock extension, 1 ML, 680 mm	—	2211-2390	K4005-07-N03
9	Tilt locking plate, right	—	—	**
	Tilt locking plate, left	—	—	**
10	Locking plate	—	—	**
10a	Locking plate safety	—	—	**
10b	Tilt locking plate safety	—	—	**
11	Lifting plate	—	751-2390	**
12	Wrong operation safety device with sash lifter	—	751-2390	A7001-00-N03
13	Concealed bottom hinge PVC, 9 mm, left / right	—	—	A5025-09-L/R03
	Concealed bottom hinge PVC, 13 mm, left / right	—	—	A5025-13-L/R03
14	Concealed bottom sash hinge, 9 mm, left / right	—	—	A5027-09-L/R03
	Concealed bottom sash hinge, 13 mm, left / right	—	—	A5027-13-L/R03
20	Concealed hinge packer, 13 mm, left / right	—	—	A7**-13-L/R03
21	Sash turning restrictor	—	—	A7110-00-N03
27	Locking plate, integrated slit	—	—	**
28	Locking plate for integrated slit (frame part)	—	—	**
29	Balcony catch	—	—	A7184-13-N03
29b	Balcony locking pin	—	—	A7207-00-N03
36	Extension lock for corner transmission 480 mm, 1 ML	—	—	K4010-00-N03
	Extension lock for corner transmission 680 mm, 1 ML	—	—	K4010-07-N03
	Extension lock for corner transmission 880 mm, 2 ML	—	—	K4010-09-N03
	Extension lock for corner transmission 480 mm, 1 MR	—	—	K4030-00-N03
38	Magnetic balcony catch, frame part	—	—	A7053-00-N03
38a	Magnetic balcony catch, sash part	—	—	A7055-***-N03
39	Extension lock 240 mm, 1 MR	—	—	K4050-02-N03
	Extension lock 480 mm, 1 MR	—	—	K4050-05-N03

\* – with offset relative to center  
 \*\* – see the section "Profile-dependent elements" of catalogues KOMFORT LINE K-3 or ELITE+  
 \*\*\* – according to displacement axis of sash groove (9 mm, 10 mm, 13 mm, 14 mm)